
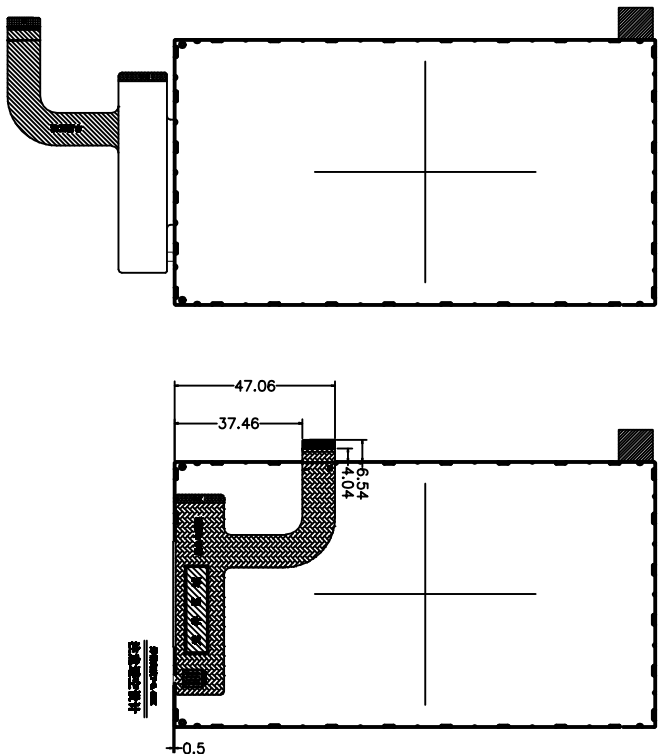


CUSTOMER:

接口定义

Pin No.	Pin Name
1	VDD_28V
2	VDD_28V
3	VDD_28V
4	NC
5	NC
6	NC
7	GND
8	JST_N0
9	JST_P0
10	GND
11	JST_N1
12	JST_P1
13	GND
14	CLK_N
15	CLK_P
16	GND
17	JST_N2
18	JST_P2
19	GND
20	JST_N3
21	JST_P3
22	GND
23	IDVCC_18V
24	RESET
25	TE
26	NC
27	LED-
28	LED-
29	NC
30	LED+
31	LED+

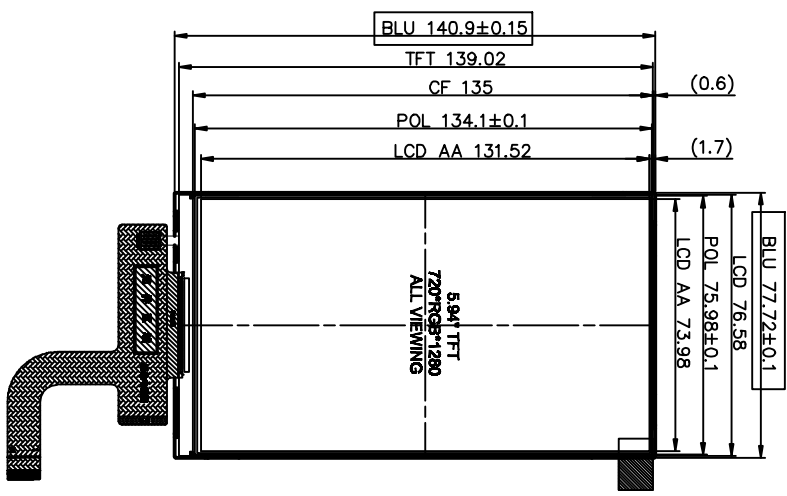

弯折示意图  
弯折出货

连接器型号:

NOTES:

- 1.LED CIRCUIT DIAGRAM:
2. VIEWING DIRECTION: FULL view
- 3.BACKLIGHT:12 CHIP-WHITE LED
- 4.OPERATING TEMPERATURE: -15°C TO 65°C
5. 产品满足ROHS要求
- 6.GENERAL TOLERANCE : ±0.2 "( )"reference dimension
- 7.最佳工作电流: 15~20 mA/LED
- 8.I.C:NT35521S; LCD: AU0 4.95 HD TFT colors LCD
9. 客户终端使用连接器型号:
10. 产品要求SLERP可以硬件无供电
11. 建议贴合的TP开窗尺寸比LCD AA左右宽度尺寸单边大0.25.

CUSTOMER APPROVE

修改记录

名称

深圳艾克森科技有限公司

Mechanical

Electrical

TOLERANCE

PRODUCT NO.  
EX-T50HD571A

DRAW NO.  
EX-T50HD571A01-LCM

DECIMAL  
.xx ± .20  
±1/4"

DWN: 蔡宗强

2015.08.12

DSN:

APPD:

CHKD:



NOT IN SCALE

UNIT: mm

SHEET: 1-1