


# BHG128128A

## CONTOUR DRAWING & BLOCK DIAGRAM

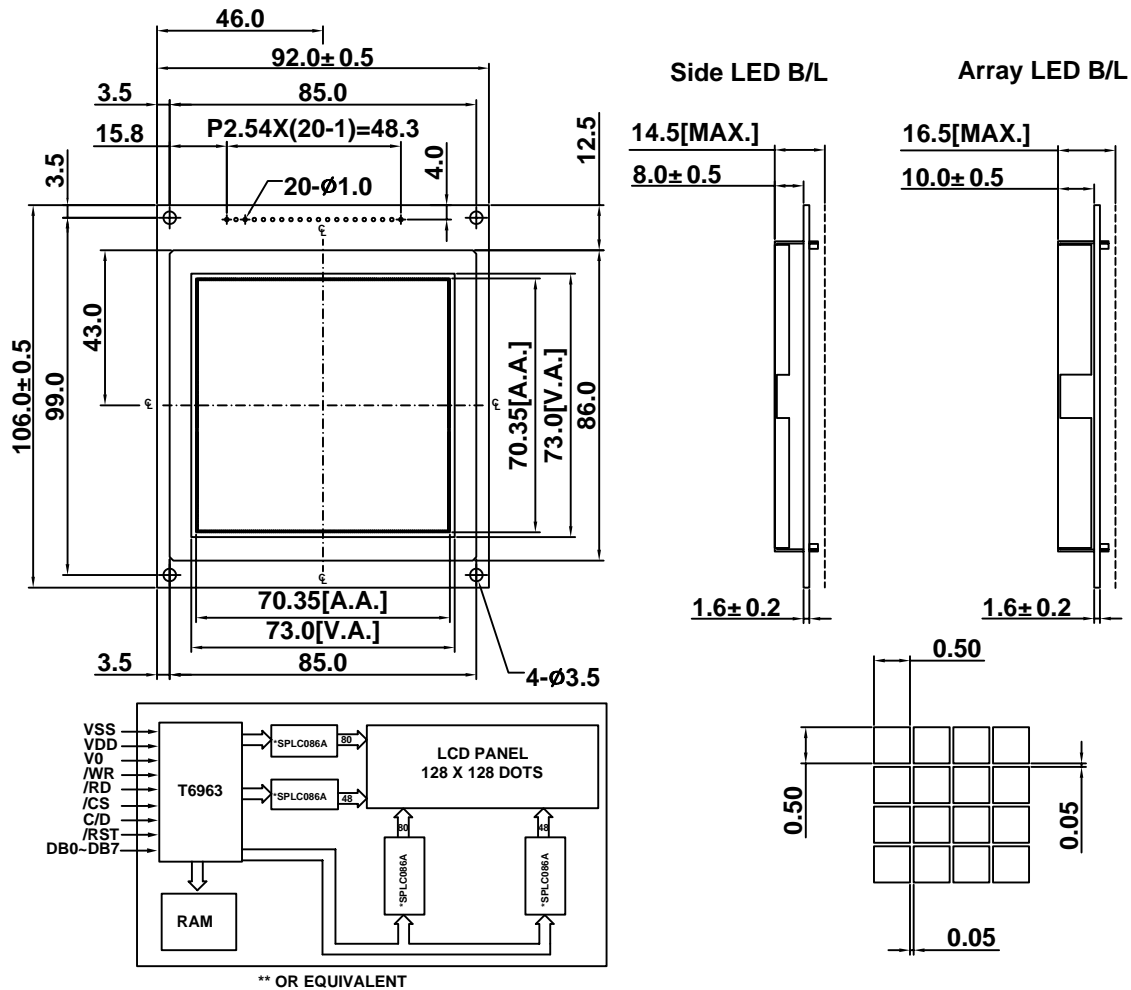

MECHANICAL SPECIFICATION		
ITEM	SPECIFICATION	UNIT
Module Size	92.0X106.0X14.50/16.50	mm
Viewing Area	73.0X73.0	mm
Number of dots	128X128	dots
Dot Pitch	0.55X0.55	mm
Dot Size	0.50X0.50	mm

ABSOLUTE MAXIMUM RATINGS				
PARAMETER	SYMBOL	MIN.	MAX.	UNIT
Supply Voltage	Vdd	-0.3	7.0	V
LCD Supply Voltage	Vlcd(Vdd-V0)	0	30	V
Input Voltage	Vin	-0.3	Vdd+0.3	V
Operating Temperature*	Top	0/-20	50/70	° C
Storage Temperature*	Tstr	-10/-30	60/80	° C

PIN CONNECTIONS		
PIN	SYMBOL	DESCRIPTION
1	FGND	Frame GND
2	VSS	Ground
3	VDD	Supply voltage for LCD(+)
4	V0	Supply voltage for LCD(-)
5	/WR	Write Data into T6963C
6	/RD	Read Data from T6963C
7	/CS	Chip enable for T6963C
8	C/D	Command/Data
9	/RST	Reset
10-17	DB0-DB7	Data Bus
18	FS	Pins for selection of font
19	A	Anode for backlight
20	K	Cathode for backlight

ELECTRICAL CHARACTERISTICS(Ta=25° C)						
ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Voltage(logic)	Vdd	-	4.5	5.0	5.5	V
Supply Current(logic)	Idd	Vdd=5.0	8.3	9.0	9.8	mA
Driving Voltage(LCD)	Vlcd	-	14.5	15.0	15.5	V
Driving Current(LCD)	Ilcd	-	1.8	2.3	2.8	mA

BACKLIGHT CHARACTERISTICS (Y-G ARRAY LED B/L Ta=25° C)						
PARAMETER	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Voltage	Vf	If=500mA	3.8	4.2	4.3	V
LED Forward Current	If	-	-	500	-	mA

BACKLIGHT CHARACTERISTICS (Y-G SIDE LED B/L Ta=25° C)						
PARAMETER	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Voltage	Vf	If=120mA	3.8	4.2	4.3	V
LED Forward Current	If	-	-	120	-	mA

\*T1/T2: T1for standard temperature LCM, T2 for wide temperature LCM