


# BHG12864A

## CONTOUR DRAWING & BLOCK DIAGRAM

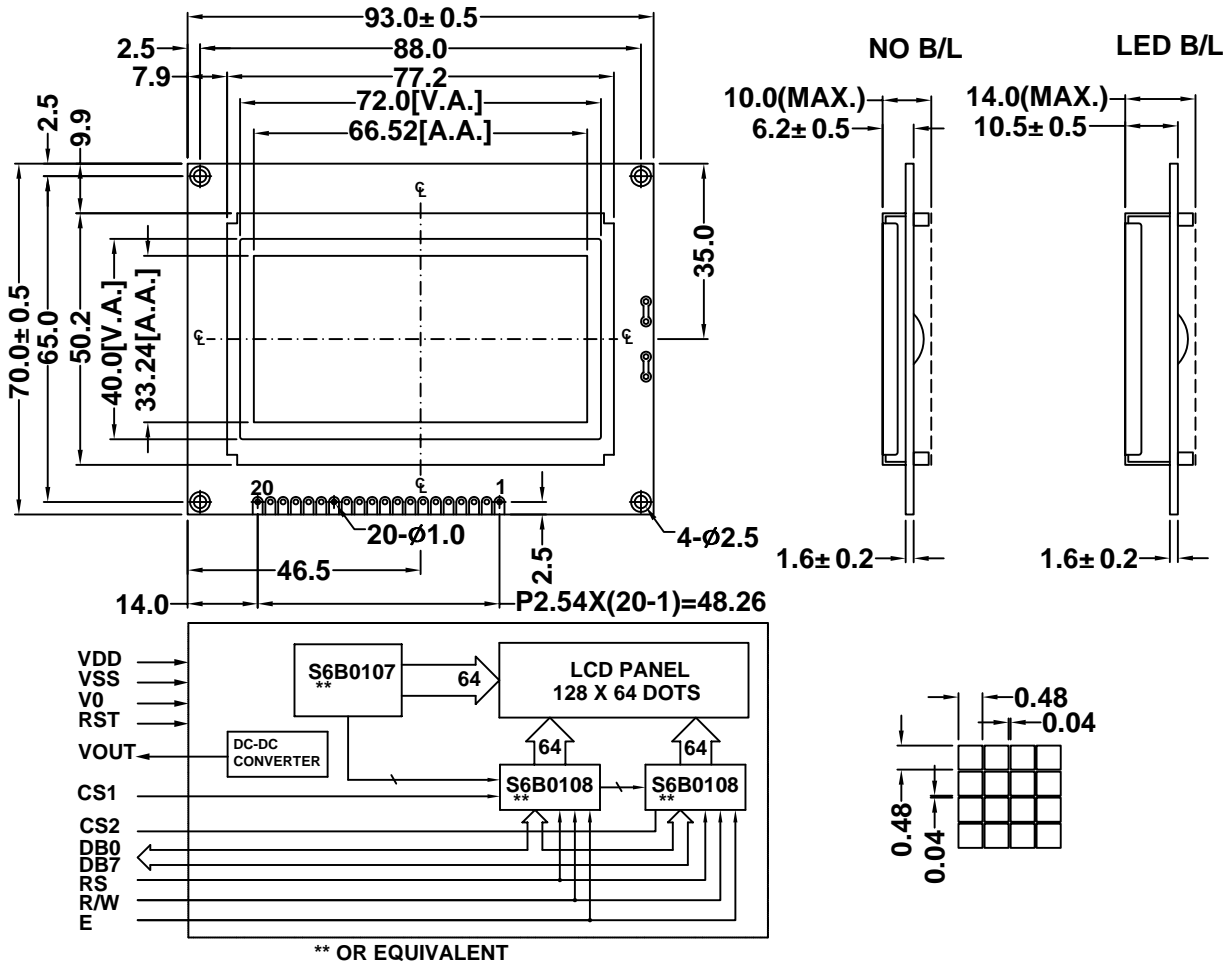

MECHANICAL SPECIFICATION		
ITEM	SPECIFICATION	UNIT
Module Size	93.0X70.0X10.0/14.0	mm
Viewing Area	72.0X40.0	mm
Number of dots	128X64	dots
Dot Pitch	0.52X0.52	mm
Dot Size	0.48X0.48	mm

ABSOLUTE MAXIMUM RATINGS				
PARAMETER	SYMBOL	MIN.	MAX.	UNIT
Supply Voltage	Vdd	-0.3	7.0	V
LCD Supply Voltage	Vlcd(Vdd-Vee)	Vdd-19.0	Vdd+0.3	V
Input Voltage	Vin	-0.3	Vdd+0.3	V
Operating Temperature*	Top	0/-20	50/70	° C
Storage Temperature*	Tstr	-10/-30	60/80	° C

PIN CONNECTIONS		
PIN	SYMBOL	DESCRIPTION
1	Vss	Power Supply :0V
2	Vdd	Power Supply :+5V
3	Vee	Supply voltage for LCD
4	RS	Register Select
5	R/W	Read/Write
6	E	Enable
7-14	DB0-DB7	Data Bus
15	CS1	Chip1 Select Signal
16	CS2	Chip2 Select Signal
17	RST	Reset Signal
18	Vout	Negative Voltage
19	A	Anode for backlight
20	K	Cathode for backlight

ELECTRICAL CHARACTERISTICS(Ta=25° C)						
ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Voltage(logic)	Vdd	-	4.5	5.0	5.5	V
Supply Current(logic)	Idd	Vdd=5.0	3.2	3.9	4.3	mA
Driving Voltage(LCD)	Vlcd	-	10.8	13.0	13.6	V
Driving Current(LCD)	Ilcd	-	3.0	3.6	4.0	mA

BACKLIGHT CHARACTERISTICS (Ta=25° C)						
PARAMETER	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Voltage	Vf	If=330mA	3.8	4.1	4.3	V
LED Forward Current	If	-	-	330	-	mA
LED Dissipation	Pd	-	-	1360	-	mW

\*T1/T2: T1for standard temperature LCM, T2 for wide temperature LCM