




## FEATURES


- High corrosion resistance and drip-proof construction  
Pressure port attachment made of SUS 316L  
Proven IP-65 grade gauge body (IP65 in accordance with IEC)
- For differential pressure
- Two types of joint are provided  
Rc 1/4, 1/4 Flare fitting (7/16 - 20 UNF)

### INTERNAL STRUCTURE (1/4 Flare fitting)

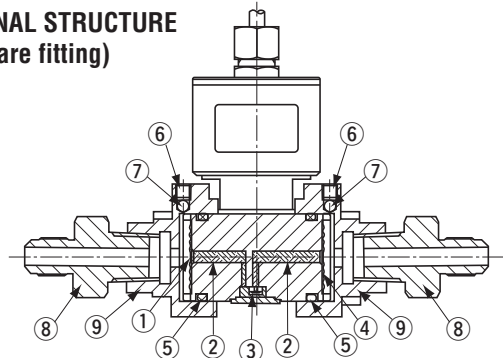

Part name	Material
① Stainless steel diaphragm	SUS 316L
② Sealed liquid	Silicone oil
③ Sensor chip	Silicone
④ Stainless steel diaphragm	SUS 316L
⑤ "O" ring	Fluoro-rubber
⑥ Ari-bleeding screw	SUS 304
⑦ Ceramic ball	Alumina
⑧ Flare fitting	SUS 304
⑨ Flange	

## MODEL NUMBER DESIGNATION

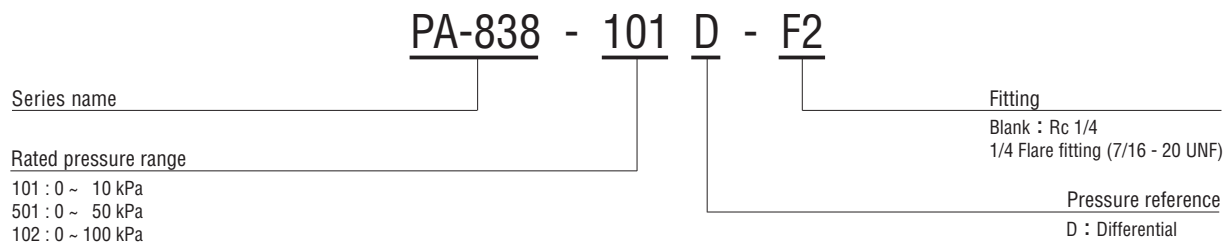

## 型式一覧表 LIST OF MODEL NUMBERS

Pressure reference	Fitting	Differential		
		0 ~ 10	0 ~ 50	0 ~ 100
Rc 1/4		PA-838-101D	PA-838-501D	PA-838-102D
1/4 Flare fitting (7/16 - 20 UNF)		PA-838-101D-F2	PA-838-501D-F2	PA-838-102D-F2

※ Verify the above model numbers when placing orders.

# PA-838-D

## PRESSURE TRANSDUCERS WITH AMP.

### STANDARD SPECIFICATIONS

● Unless otherwise specified, the specs are defined at an ambient temperature of  $25 \pm 5$  °C, excitation voltage of 24 V DC, load resistance of 250  $\Omega$  and line pressure of 0 MPa.

Item	Model number	PA-838				
		101D	501D	102D		
General specifications	Pressure reference	Differential				
	Rated pressure range	※1	kPa	10	50	100
	Maximum pressure	※2	kPa	200	300	500
	Line pressure		MPa	2		
	Operating temp. range		°C	- 20 ~ 70		
	Compensated temp. range		°C	0 ~ 50		
	Operating humidity		%RH	35 ~ 85 (No condensation)		
	Storage temp.		°C	- 20 ~ 70 (Atmospheric pressure, humidity 65 %RH maximum)		
	Pressure medium			Corrosive gases/liquids compatible with SUS304		
	Insulation resistance		M $\Omega$ minimum	100 (500 V DC)		
	Dielectric strength			500 V AC, 60 s (Leakage current 1 mA maximum)		
	Sealed liquid			Silicone oil		
	Pressure port			Rc 1/4, 1/4 Flare fitting (7/16 - 20 UNF)		
	Net weight		g	Rc 1/4 : Approx. 500, 1/4 Flare fitting : Approx. 590		
	Drip-proof structure			IP65		
Power	Supply voltage		V DC	24 $\pm$ 10 % (Including ripple voltage)		
Analog output	Output current		mA DC	4 ~ 20		
	Zero current		mA (at 25 °C)	4 $\pm$ 0.2		
	Span current		mA (at 25 °C)	16 $\pm$ 0.2		
	Load resistance		$\Omega$	0 ~ 500		
	Linearity/Hysteresis		%F.S.	$\pm$ 0.5		
	Thermal error	ZERO	%F.S./°C	$\pm$ 0.10	$\pm$ 0.05	
		SPAN	%F.S./°C	$\pm$ 0.10	$\pm$ 0.05	
	Response		ms maximum	Approx. 2		
Gravitational effect (From horizontal position to vertical position)		%F.S.	$\pm$ 5	$\pm$ 3	$\pm$ 1	

※1 : Pressure range Hi side port — Lo side port : 0 ~ rated pressure

※2 : Please adjust load resistance at 500  $\Omega$  when exceeding rated pressure.


# PA-838-D

## PRESSURE TRANSDUCERS WITH AMP.

### ENVIRONMENTAL CHARACTERISTICS

Test item	Test conditions (At 25 ± 5 °C)	Permissible change
Vibration	10 ~ 500 Hz, 1.5 mm maximum/98.1 m/s <sup>2</sup> , 3 directions for 2 hours each	Zero current, Span current: ± 1 %FS. maximum each
Shock	490 m/s <sup>2</sup> , 3 directions for 3 times each	
Pressure cycling	0 ~ Rated pressure/Rated pressure range, 10 <sup>6</sup> cycles	
Moisture resistance	40 °C, 90 ~ 95 %RH, 240 hrs.	

### RECOMMENDED EXTERNAL SCHEMATICS

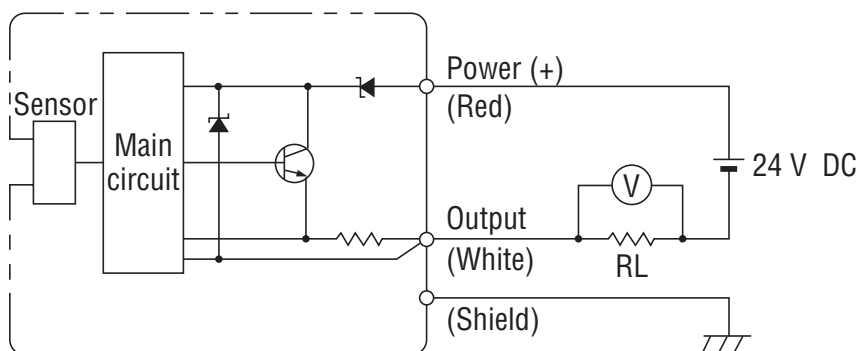


# PA-838-D

## PRESSURE TRANSDUCERS WITH AMP.

### OUTLINE DIMENSIONS


Unless otherwise specified, tolerance : ± 0.5 (Unit: mm)

#### Configurations of fitting Rc 1/4 type

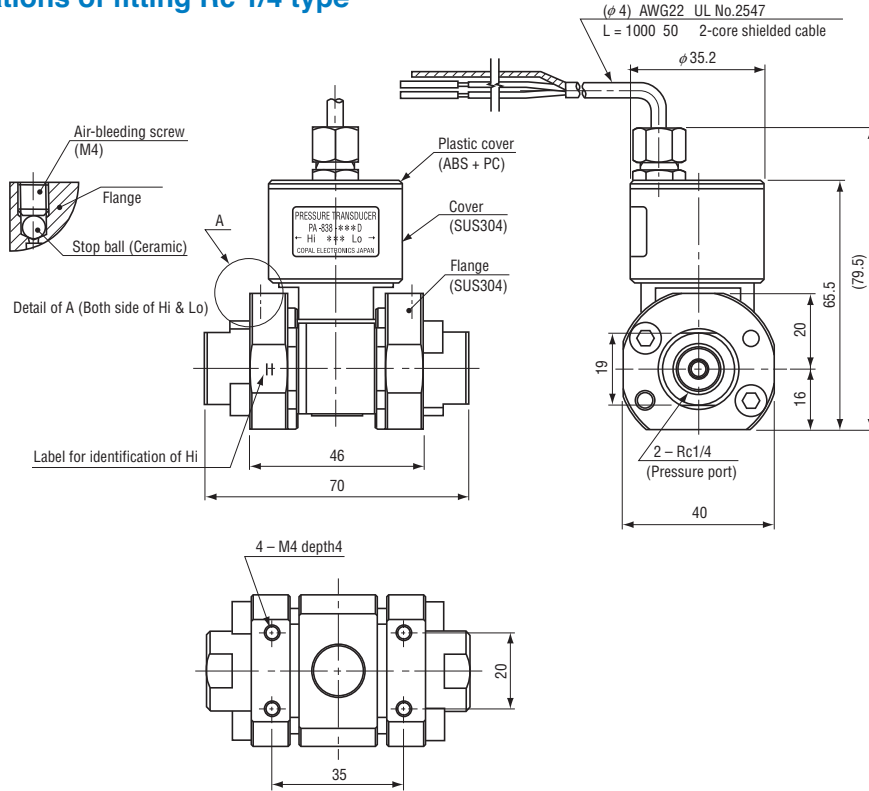

Wire color	Connection
Red	Power ⊕
White	Output
Shield	N.C.

#### Configurations of 1/4 flare fitting (7/16 - 20 UNF) type

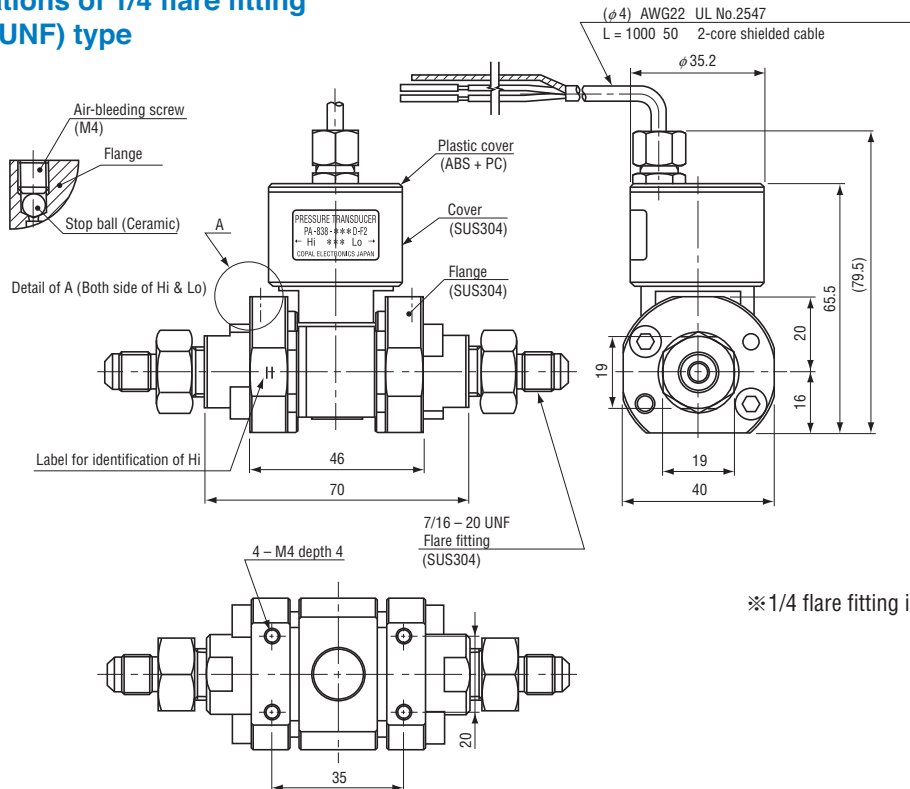

※ 1/4 flare fitting is packed separately.